

**ACJT810-10K 8A TRIAC**

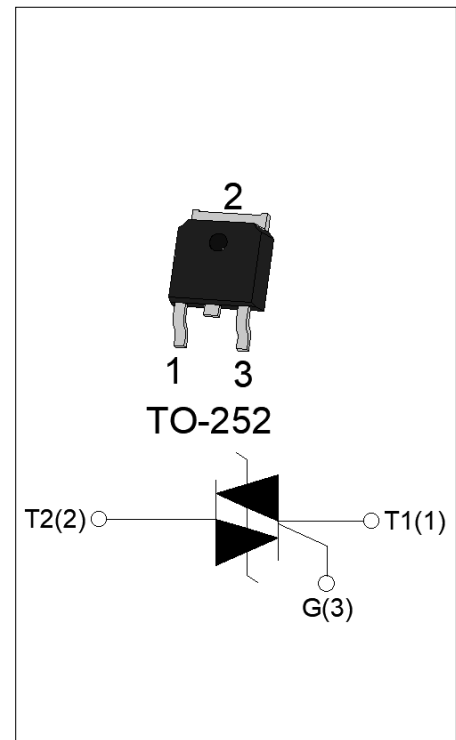
Rev.A.1.2

**DESCRIPTION:**

The ACJT810-10K triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. The ACJT810-10K embeds a TVS structure to absorb the inductive turn-off energy such as those described in the IEC 61000-4-5 standards. Package TO-252 is RoHS compliant.

**MAIN FEATURES**

| Symbol             | Value    | Unit |
|--------------------|----------|------|
| $I_{T(RMS)}$       | 8        | A    |
| $V_{DRM}/V_{RRM}$  | 1000     | V    |
| $I_{GT\ I/II/III}$ | 10/10/10 | mA   |


**ABSOLUTE MAXIMUM RATINGS**

| Parameter                                                                                            | Symbol       | Value   | Unit             |
|------------------------------------------------------------------------------------------------------|--------------|---------|------------------|
| Storage junction temperature range                                                                   | $T_{stg}$    | -40-150 | °C               |
| Operating junction temperature range                                                                 | $T_j$        | -40-125 | °C               |
| Repetitive peak off-state voltage ( $T_j=25^{\circ}C$ )                                              | $V_{DRM}$    | 1000    | V                |
| Repetitive peak reverse voltage ( $T_j=25^{\circ}C$ )                                                | $V_{RRM}$    | 1000    | V                |
| RMS on-state current ( $T_c \leq 107^{\circ}C$ )                                                     | $I_{T(RMS)}$ | 8       | A                |
| Non repetitive surge peak on-state current (full cycle , $t_p=20ms$ , $T_j=25^{\circ}C$ )            | $I_{TSM}$    | 80      | A                |
| Non repetitive surge peak on-state current (full cycle , $t_p=16.6ms$ , $T_j=25^{\circ}C$ )          |              | 88      |                  |
| $I^2t$ value for fusing ( $t_p=10ms$ , $T_j=25^{\circ}C$ )                                           | $I^2t$       | 32      | A <sup>2</sup> s |
| Critical rate of rise of on-state current ( $I_G=2 \times I_{GT}$ , $f=100Hz$ , $T_j=125^{\circ}C$ ) | $di/dt$      | 100     | A/ $\mu s$       |
| Peak gate current ( $t_p=20\mu s$ , $T_j=125^{\circ}C$ )                                             | $I_{GM}$     | 4       | A                |
| Average gate power dissipation ( $T_j=125^{\circ}C$ )                                                | $P_{G(AV)}$  | 0.5     | W                |
| Peak gate power                                                                                      | $P_{GM}$     | 10      | W                |

|                                                                                      |          |   |    |
|--------------------------------------------------------------------------------------|----------|---|----|
| Peak pulse voltage<br>( $T_j=25^{\circ}\text{C}$ ; non-repetitive, off-state; FIG.8) | $V_{pp}$ | 2 | kV |
|--------------------------------------------------------------------------------------|----------|---|----|

**ELECTRICAL CHARACTERISTICS** ( $T_j=25^{\circ}\text{C}$  unless otherwise specified)

| Symbol      | Test Condition                                                                     | Quadrant    | Value |      | Unit             |
|-------------|------------------------------------------------------------------------------------|-------------|-------|------|------------------|
| $I_{GT}$    | $V_D=12\text{V}$ $R_L=33\Omega$                                                    | I - II -III | MAX.  | 10   | mA               |
| $V_{GT}$    |                                                                                    | I - II -III | MAX.  | 1    | V                |
| $V_{GD}$    | $V_D=V_{DRM}$ $T_j=125^{\circ}\text{C}$<br>$R_L=3.3\text{k}\Omega$                 | I - II -III | MIN.  | 0.2  | V                |
| $I_L$       | $I_G=1.2I_{GT}$                                                                    | I -III      | MAX.  | 25   | mA               |
|             |                                                                                    | II          |       | 30   |                  |
| $I_H$       | $I_T=100\text{mA}$                                                                 |             | MAX.  | 15   | mA               |
| $dV/dt$     | $V_D=670\text{V}$ Gate Open $T_j=125^{\circ}\text{C}$                              |             | MIN.  | 300  | V/ $\mu\text{s}$ |
| $(dI/dt)_c$ | $(dV/dt)_c=10\text{V}/\mu\text{s}$ , $T_j=125^{\circ}\text{C}$                     |             | MIN.  | 3    | A/ms             |
| $t_{on}$    | $I_G=20\text{mA}$ $I_A=200\text{mA}$ $I_R=20\text{mA}$<br>$T_j=25^{\circ}\text{C}$ |             | TYP.  | 4    | $\mu\text{s}$    |
| $t_{off}$   |                                                                                    |             |       | 50   |                  |
| $V_{CL}$    | $I_{CL}=0.1\text{mA}$ $t_p=1\text{ms}$                                             |             | MIN.  | 1050 | V                |

**STATIC CHARACTERISTICS**

| Symbol    | Parameter                                |                           | Value(MAX.) | Unit             |
|-----------|------------------------------------------|---------------------------|-------------|------------------|
| $V_{TM}$  | $I_{TM}=10\text{A}$ $t_p=380\mu\text{s}$ | $T_j=25^{\circ}\text{C}$  | 1.4         | V                |
| $V_{TO}$  | Threshold voltage                        | $T_j=125^{\circ}\text{C}$ | 0.78        | V                |
| $R_D$     | Dynamic resistance                       | $T_j=125^{\circ}\text{C}$ | 38          | $\text{m}\Omega$ |
| $I_{DRM}$ | $V_D=V_{DRM}$ $V_R=V_{RRM}$              | $T_j=25^{\circ}\text{C}$  | 8           | $\mu\text{A}$    |
| $I_{RRM}$ |                                          | $T_j=125^{\circ}\text{C}$ | 0.8         | mA               |

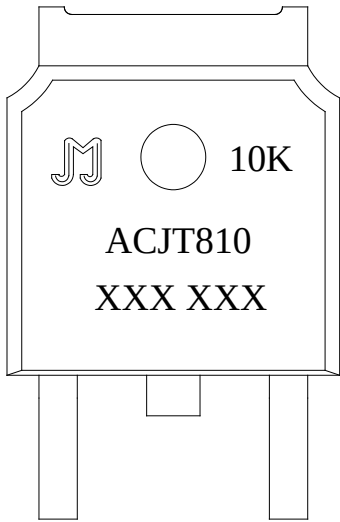

**THERMAL RESISTANCES**

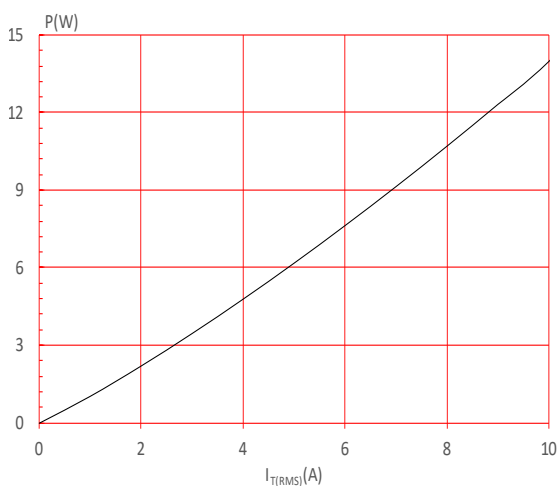
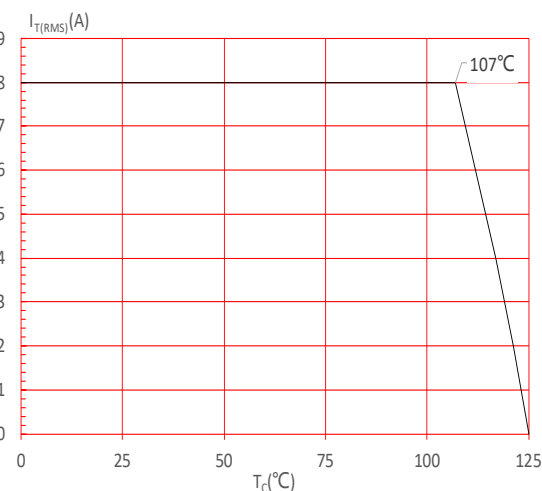
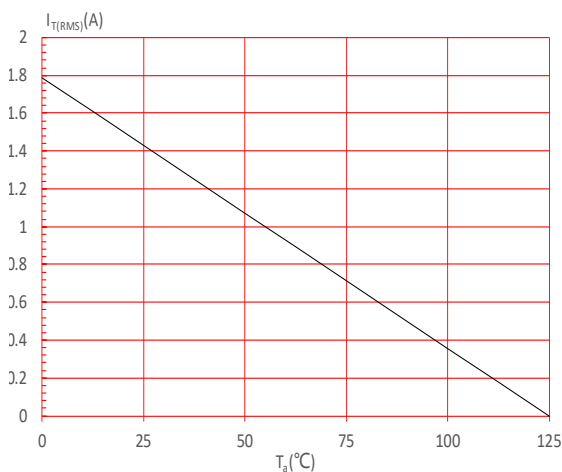
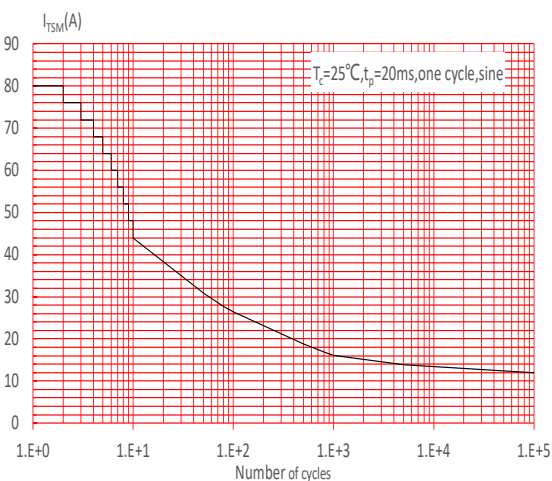
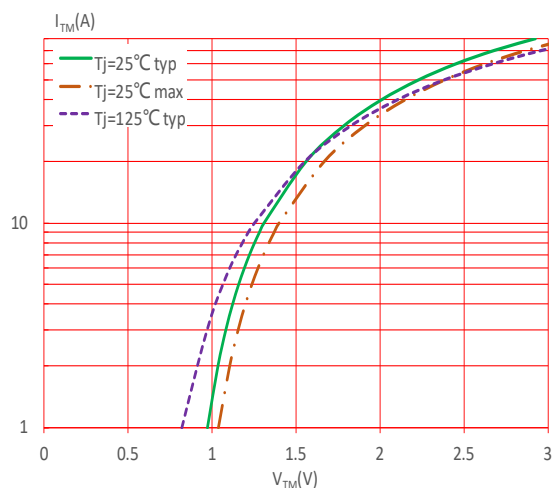
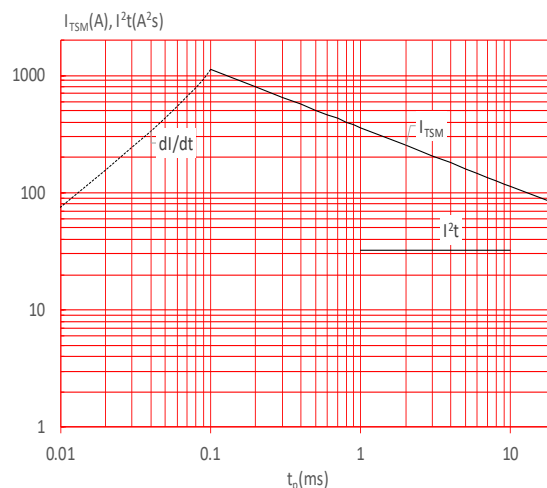
| Symbol        | Parameter                | Value | Unit                        |
|---------------|--------------------------|-------|-----------------------------|
| $R_{th(j-c)}$ | junction to case (AC)    | 1.7   | $^{\circ}\text{C}/\text{W}$ |
| $R_{th(j-a)}$ | junction to ambient (AC) | 70    | $^{\circ}\text{C}/\text{W}$ |

ORDERING INFORMATION

|                                   |   |                           |   |    |                                    |          |                               |
|-----------------------------------|---|---------------------------|---|----|------------------------------------|----------|-------------------------------|
| AC                                | J | T                         | 8 | 10 | -10                                | K        | -/                            |
| AC switch                         |   | Triacs                    |   |    |                                    |          | Blank:Tube<br>-TR:Tape & Reel |
| JieJie Microelectronics Co., Ltd. |   | $I_{T(RMS)}:8A$           |   |    |                                    | K:TO-252 |                               |
|                                   |   | 10: $I_{GT1-3} \leq 10mA$ |   |    | 10: $V_{DRM} / V_{RRM} \geq 1000V$ |          |                               |

MARKING

|                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>The diagram shows a TO-252 package with the following markings: a stylized 'M' logo, a circle, '10K', 'ACJT810', and 'XXX XXX'.</p> |  <p>The diagram shows the breakdown of the marking code 'XXX XXX':<br/>- The first 'XXX' is divided into 'Year' and 'Month'.<br/>- The second 'XXX' is labeled as 'Production Code'.</p> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**FIG.1:** Maximum power dissipation versus RMS on-state current**FIG.2:** RMS on-state current versus case temperature**FIG.3:** RMS on-state current versus ambient temperature (printed circuit board FR4, copper thickness:35μm)(full cycle)**FIG.4:** Surge peak on-state current versus number of cycles**FIG.5:** On-state characteristics**FIG.6:** Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 20ms$ , and corresponding value of  $I^2t$  ( $di/dt < 100A/\mu s$ )

**FIG.7:** Relative variations of gate trigger current, holding current and latching current versus junction temperature

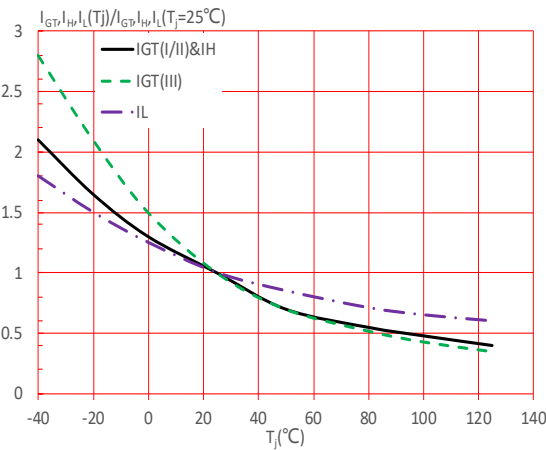
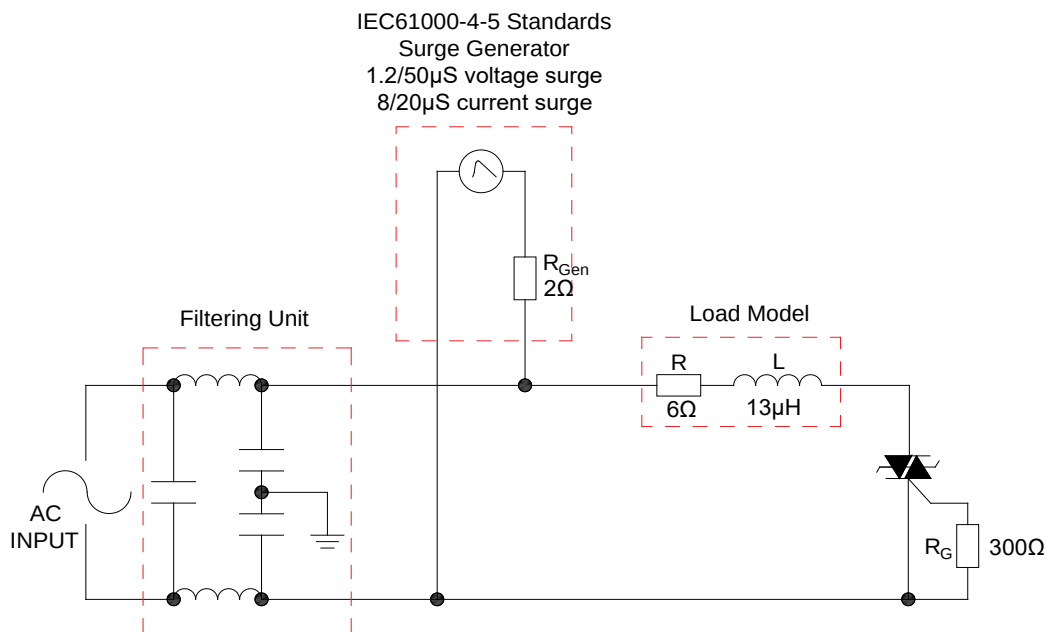
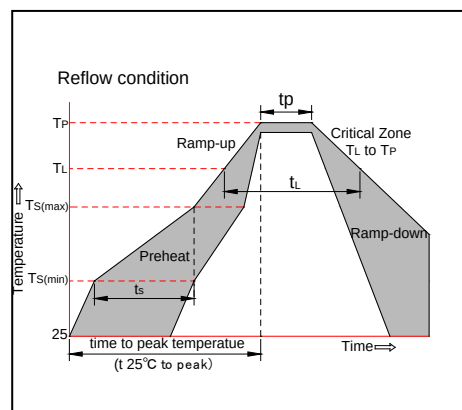


FIG.8: Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



## SOLDERING PARAMETERS

| Reflow Condition                                          |                                   | Pb-Free assembly<br>(see figure at right) |
|-----------------------------------------------------------|-----------------------------------|-------------------------------------------|
| Pre Heat                                                  | -Temperature Min ( $T_{s(min)}$ ) | +150°C                                    |
|                                                           | -Temperature Max( $T_{s(max)}$ )  | +200°C                                    |
|                                                           | -Time (Min to Max) ( $t_s$ )      | 60-180 secs.                              |
| Average ramp up rate<br>(Liquidus Temp ( $T_L$ ) to peak) |                                   | 3°C/sec. Max                              |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                      |                                   | 3°C/sec. Max                              |
| Reflow                                                    | -Temperature( $T_L$ )(Liquidus)   | +217°C                                    |
|                                                           | -Temperature( $t_L$ )             | 60-150 secs.                              |
| Peak Temp ( $T_p$ )                                       |                                   | +260(+0/-5)°C                             |
| Time within 5°C of actual<br>Peak Temp ( $t_p$ )          |                                   | 20-40secs.                                |
| Ramp-down Rate                                            |                                   | 6°C/sec. Max                              |
| Time 25°C to Peak Temp ( $T_p$ )                          |                                   | 8 min. Max                                |
| Do not exceed                                             |                                   | +260°C                                    |



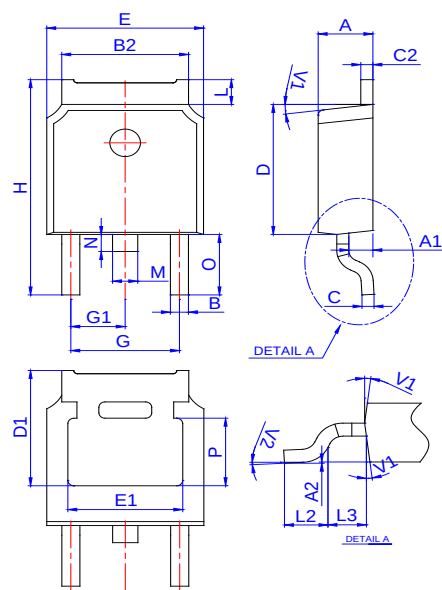
## ORDERING INFORMATION

| Order code     | Voltage<br>$V_{\text{DRM}}/V_{\text{RRM}}$ (V) | IGT(mA) | Package | Base qty.<br>(pcs) | Delivery<br>mode |
|----------------|------------------------------------------------|---------|---------|--------------------|------------------|
| ACJT810-10K    | 1000                                           | 10      | TO-252  | 80                 | Tube             |
| ACJT810-10K-TR |                                                |         |         | 2,500              | Tape & Reel      |

## Document Revision History

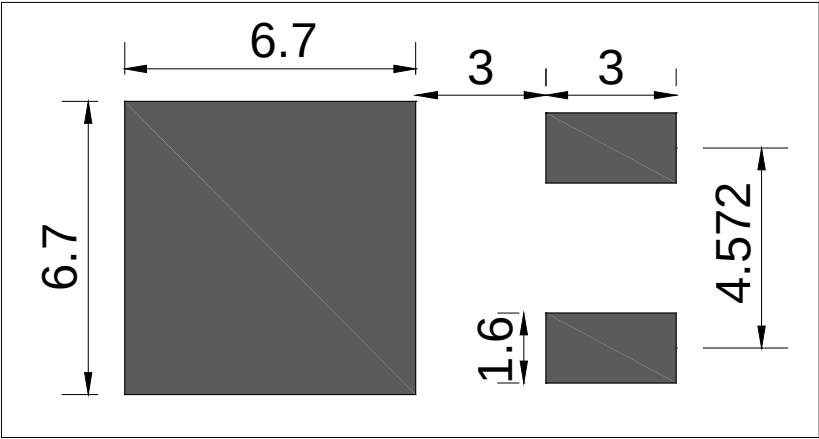
| Date         | Revision | Changes                                            |
|--------------|----------|----------------------------------------------------|
| Apr.13, 2023 | A.1.0    | Last updated                                       |
| Oct.23, 2023 | A.1.1    | Change $R_{\text{th(j-c)}}$ & $R_{\text{th(j-a)}}$ |
| Oct.22, 2025 | A.1.2    | Revise PACKAGE MECHANICAL DATA                     |

PACKAGE MECHANICAL DATA



| Ref. | Dimensions  |      |       |          |      |       |
|------|-------------|------|-------|----------|------|-------|
|      | Millimeters |      |       | Inches   |      |       |
|      | Min.        | Typ. | Max.  | Min.     | Typ. | Max.  |
| A    | 2.10        |      | 2.50  | 0.083    |      | 0.098 |
| A1   | 0.80        |      | 1.20  | 0.031    |      | 0.047 |
| A2   | 0           |      | 0.15  | 0        |      | 0.006 |
| B    | 0.66        |      | 0.86  | 0.026    |      | 0.034 |
| B2   | 5.18        |      | 5.48  | 0.202    |      | 0.216 |
| C    | 0.40        |      | 0.60  | 0.016    |      | 0.024 |
| C2   | 0.44        |      | 0.58  | 0.017    |      | 0.023 |
| D    | 5.90        |      | 6.30  | 0.232    |      | 0.248 |
| D1   | 5.30REF     |      |       | 0.209REF |      |       |
| E    | 6.40        |      | 6.80  | 0.252    |      | 0.268 |
| E1   | 4.63        |      |       | 0.182    |      |       |
| G    | 4.47        |      | 4.67  | 0.176    |      | 0.184 |
| G1   | 2.18        |      | 2.38  | 0.086    |      | 0.094 |
| H    | 9.50        |      | 10.70 | 0.374    |      | 0.421 |
| L    | 1.09        |      | 1.21  | 0.043    |      | 0.048 |
| L2   | 1.35        |      | 1.65  | 0.053    |      | 0.065 |
| L3   | 1.10        |      | 1.50  | 0.043    |      | 0.059 |
| M    | 0.65        |      | 0.95  | 0.026    |      | 0.037 |
| N    | 0.65        |      | 0.95  | 0.026    |      | 0.037 |
| O    | 2.80        |      | 3.20  | 0.110    |      | 0.126 |
| P    | 3.10        |      | 3.30  | 0.122    |      | 0.130 |
| V1   |             | 7°   |       |          | 7°   |       |
| V2   | 0°          |      | 6°    | 0°       |      | 6°    |

FOOTPRINT-TO-252 (dimensions in mm)





The technical drawing consists of two views of a mechanical component:

- Front View (Left):** Shows a long rectangular part with a total length dimension of  $548 \pm 1$ . On the left end, there is a circular feature with a diameter dimension of  $\phi 3 \pm 0.05$ . A small square feature is located at a distance of 6 from the left edge. Another feature is located at a distance of 4 from the left edge.
- Side View (Right):** Shows the profile of the part with several vertical dimensions:
  - Total height:  $19,75$
  - Top flange thickness:  $1,50 \pm 0,10$
  - Distance from top flange to start of main body:  $7,25 \pm 0,10$
  - Main body height:  $\pm 0,10$
  - Bottom flange thickness:  $2,40$
  - Distance from bottom flange to start of main body:  $0,50$
  - Internal width of main body:  $1,20$
  - Width of internal cavity:  $1,85 \pm 0,10$
  - Width of bottom flange:  $2,2 \pm 0,10$
  - Overall width at base:  $5,25 \pm 0,10$
  - Horizontal distance from left face to centerline:  $1,90 \pm 0,10$
  - Horizontal distance from left face to right edge:  $1,40 \pm 0,10$

Technical drawing of a 12V 100Ah battery, showing front, side, and cross-sectional views with dimensions in mm.

**Front View Dimensions:**

- Overall width:  $W$
- Overall height:  $H$
- Terminal spacing:  $P0$
- Terminal diameter:  $\phi 1$
- Terminal height:  $P1$
- Terminal pitch:  $P2$
- Terminal diameter:  $\phi 1$
- Terminal height:  $P1$
- Terminal pitch:  $P2$

**Side View Dimensions:**

- Terminal thickness:  $T$
- Terminal angle:  $5^\circ \text{ MAX}$
- Terminal height:  $t1$
- Overall height:  $H0$
- Terminal width:  $K0$

**Cross-section A-A Dimensions:**

- Terminal width:  $A0$
- Terminal angle:  $5^\circ$

**Top View Dimensions:**

- Overall diameter:  $\phi 30.2 \pm 0.2$
- Terminal diameter:  $\phi 12.8$
- Terminal spacing:  $2.3 \pm 0.2$
- Terminal height:  $1.96 \pm 0.2$
- Terminal width:  $16.8 \pm 0.5$
- Terminal height:  $100 \pm 0.5$
- Terminal width:  $20.72 \pm 0.3$

| Ref. | Dimensions  |       |       |        |       |       |
|------|-------------|-------|-------|--------|-------|-------|
|      | Millimeters |       |       | Inches |       |       |
|      | Min.        | Typ.  | Max.  | Min.   | Typ.  | Max.  |
| W    | 15.90       | 16.00 | 16.10 | 0.626  | 0.630 | 0.634 |
| E    | 1.65        | 1.75  | 1.85  | 0.065  | 0.069 | 0.073 |
| F    | 7.40        | 7.50  | 7.60  | 0.291  | 0.295 | 0.299 |
| D0   | 1.50        | 1.55  | 1.60  | 0.059  | 0.060 | 0.063 |
| D1   | 1.50        | —     | —     | 0.059  | —     | —     |
| P0   | 3.90        | 4.00  | 4.10  | 0.154  | 0.157 | 0.161 |
| P1   | 7.90        | 8.00  | 8.10  | 0.311  | 0.315 | 0.319 |
| P2   | 1.90        | 2.00  | 2.10  | 0.075  | 0.079 | 0.083 |
| 10P0 | 39.80       | 40.00 | 40.20 | 1.567  | 1.575 | 1.583 |
| A0   | 6.80        | 6.90  | 7.00  | 0.267  | 0.272 | 0.276 |
| B0   | 10.40       | 10.50 | 10.60 | 0.408  | 0.413 | 0.417 |
| K0   | 2.60        | 2.70  | 2.80  | 0.102  | 0.106 | 0.110 |
| T    | 0.25        | 0.30  | 0.35  | 0.010  | 0.012 | 0.014 |
| t1   | 0.10        | —     | —     | 0.004  | —     | —     |

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.